

## Overview

Vision Technology provides safe LiFePO4 battery solutions for UPS and Energy storage system. This battery system serves for UPS and Energy storage system with perfect compatibility and safe long cycle life.

## Features

- Can/RS485 Communication output for monitoring
- Achieve up 32 BMU in cascade communication
- Internal cell balancing ,Passive equalization , the maximum equalization current up to 300mA
- High-precision cell voltage and temperature acquisition:  $\pm 3\text{mv}$ ,  $\pm 1^\circ\text{C}$ ;
- Fan control circuit and interface, realize heat dissipation inside the module

## Module Preview



Module 51.2V60Ah


## Performance Data

Time(min)	5	10	15	20	30
Constant Power(kw)	212	134.4	91.5	65.2	47.2
Constant Current(A)	600	360	240	180	120

## Rack Specification

<b>Voltage Range(V)</b>	<b>358.4~467.2</b>	
Cell	3.2V20Ah	
Series & Parallels	128S3P	
Rated Voltage(V)	409.6	
Rated Capacity(Ah)	60	
Rated Energy(KWh)	24.57	
Maximum Charge Current(A)	60	
Discharge cut-off voltage(V)	358.4	
Charge Voltage(v)	448 ~ 467.2	
Cycle life(@25°C,1C/1C,100%DOD)	>2500	
Short-circuit current ( < 10ms)	Approx.11800A	
System Dimension(W* D* H)	(600*1000*2000 ) mm	
Total Weight(Kg)	Approx.800	
Internal Resistance Fully Charged@ 25	35mOhms	
Thermal Management	Air cooling	
Operating temperature	charge	0 ~ 50
	discharge	-20 ~ 65
Operating humidity	60 ± 25%R.H.	
Communication	CAN/RS485	
Dry Contact	Y	
System parallels	15	
Screen	optional	

## Module size

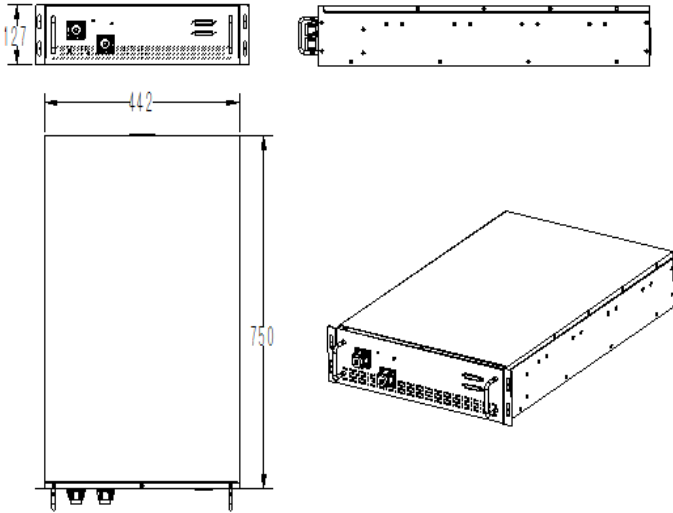

## Rack



Rack TPH212(S)

TPH212S-with LCD TPH212-without LCD

## Characteristics Curve

