



VISION GROUP
Shenzhen Center Power
Tech.Co.Ltd.,

Lithium Iron Phosphate Battery

V-LFP12V5Ah


Overview

The V-LFP12V5Ah rechargeable battery is optimized for low arte application which require high energy density.

Features

- High energy density
- Automatic protection with battery manager system internally
- Low self-discharge
- Long cycle life
- Excellent performance in all the operating temperature

Terminal




F2




Battery Specification

Nominal Characteristics	
Nominal Voltage /V	12.8
Nominal Capacity /Ah (25° C , 0.2C)	≥5
Mechanical characteristics	
Weight (approximate)/Kg	0.82±3%
Dimension L*W*H /mm	90*70*107
Terminal	F2
Electrical characteristics	
Voltage window/V	9.2 to 14.6
Float charge voltage/V	13.8
Max. continue discharge current/A	10
Max. permanent discharge current/A	25A 10Sec.
Max. continue charge current/A	5
Operating conditions	
Cycle life (+20°C 0.2C 100%DOD)	>2500 Cycles
Operating temperature	Discharge -30°C to 60°C; Charge 0°C to 60°C
Storage temperature	0 to 30°C
Storage duration	12 months at 25°C
Safety standard	UL1642 at cell level


Dis charge curves under differents temperatures

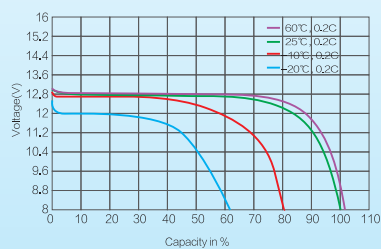

Cycle life versus DOD and temperature at 0.2C



0.2C CC-CV charge characteristic

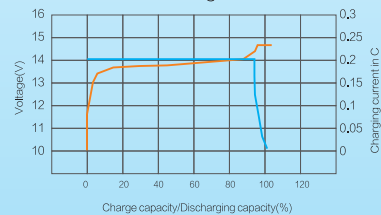

Self-discharge characteristic

