



VISION GROUP
Shenzhen Center Power
Tech.Co.Ltd.,

Lithium Iron Phosphate Battery

V-LFP24V20Ah


Overview

The V-LFP24V20AH rechargeable battery is optimized for low rate application which requires high energy density.


Features

- High energy density
- Automatic protection with battery management system internally
- Low self-discharge
- Long cycle life
- Excellent performance in all the operating temperature

Terminal




F11

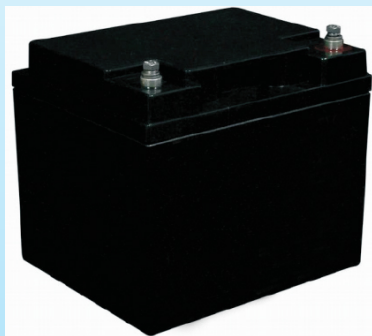


Battery Specification

Nominal Characteristics	
Nominal Voltage /V	25.6
Nominal Capacity /Ah (25°C, 0.2C)	≥20
Mechanical characteristics	
Weight (approximate)/Kg	6.2±3%
Dimension L*W*H /mm	198*166*170
Terminal	F11
Electrical characteristics	
Voltage window/V	18.4 to 30.4
Float charge voltage/V	27.6
Max. continue discharge current/A	30
Max. pulse discharge current/A	70A 10Sec.
Max. continue charge current/A	20
Operating conditions	
Cycle life (+20°C 0.2C 100%DOD)	>2500 Cycles
Operating temperature	Discharge -30°C to 60°C; Charge 0°C to 60°C
Storage temperature	0 to 30°C
Storage duration	12 months at 25°C
Safety standard	UI1642 at cell level


Dis charge curves under differents temperatures

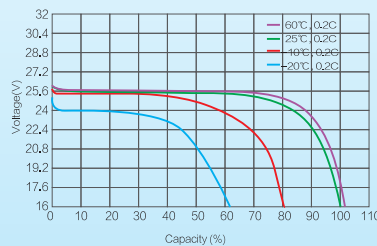

Cycle life versus DOD and temperature at 0.2C



0.2C CC-CV charge characteristic

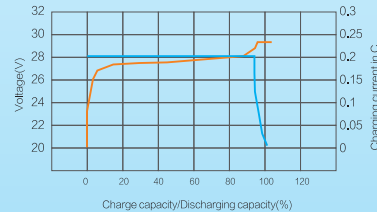

Self-discharge characteristic

